

# Real Save

## Competitive Service Life




**SUPER RDT**



# 20% longer life improvement


☆ 35% Bigger Block  
Design for better  
wearing performance

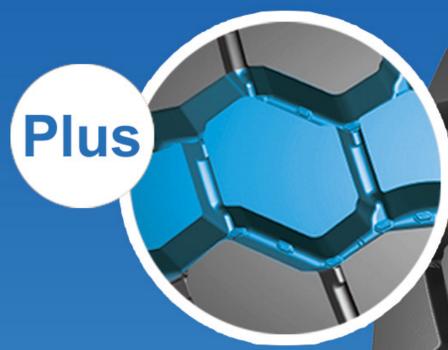

☆ Block-bridge  
Design for better cut  
resistance performance



☆ Cooling System  
Design for heat  
dispersion capacity



☆ Arc Groove Design  
for avoiding groove  
crack

Size	TRA Code	Star Rating	Rim Width & Flange	Tread Depth		Load Index/ Speed Symbol	Type	Compound
				32nds	mm			
24.00R35	E4	★★	17.00-3.5	84	67	209 B	TL	C1/CS/H2